

CÁMARA TURBOHD BALA DE 2MP



Características

- CMOS de alto rendimiento de 2 MP
- Resolución de 1920 × 1080
- Lente focal fija de 2,8 mm, 3,6 mm, 6 mm
- Interruptor día / noche
- EXIR 2.0, IR inteligente, hasta 20 m de distancia IR
- Salida de video 4 en 1 (TVI / AHD / CVI / CVBS conmutable)
- IP66




Especificaciones

Cámara	
Sensor de imagen	Sensor de imagen CMOS de 2 MP PAL
Sistema de señal	/ NTSC
Píxeles efectivos	1920 (alto) × 1080 (V)
Min. Iluminación	0.01 Lux @ (F1.2, AGC ON), 0 Lux con IR 1/25
Tiempo de obturación	(1/30) s a 1 / 50,000 s
Lente	2,8 mm, 3,6 mm, 6 mm
Montura de lente de campo de visión	103 ° (2,8 mm), 80,7 ° (3,6 mm), 50,1 ° (6 mm) M12
horizontal	
Día y noche	Filtro de corte IR
Ajuste de ángulo	Pan: 0 ° a 360 °, Inclinación: 0 ° a 180 °, Rotación: 0 ° a 360 °
Sincronización	Sincronización interna
Velocidad de fotogramas de vídeo	PAL: 1080p a 25 fps NTSC: 1080p a 30 fps
Menú	
AGC	Alto / Medio / Bajo / Apagado
D / NMode	Compatibilidad con Auto / Color / BW (blanco y negro)
BLC	negro)
DWDR	Apoyo
Idioma	Inglés
Funciones	Brillo, Nitidez, DNR, Espejo, IR inteligente
Interfaz	
Salida de vídeo	1 salida analógica HD TVI /
Boton interruptor	AHD / CVI / CVBS
General	
Condiciones de operación	- 40 ° C a 60 ° C (-40 ° F a 140 ° F), Humedad: 90% o menos (sin condensación) 12 VCC ± 15%
Fuente de alimentación	12Vcc
El consumo de energía	Max. 4 W
Nivel de protección	IP66
Material	Metal
Rango IR	Hasta 20 m
Dimensiones Peso	165 mm × 62 mm × 58 mm (6,50 "× 2,44" × 2,28 ") 400 g (0,88 libras)

Modelo de pedido

THC-B120-M

Dimensión

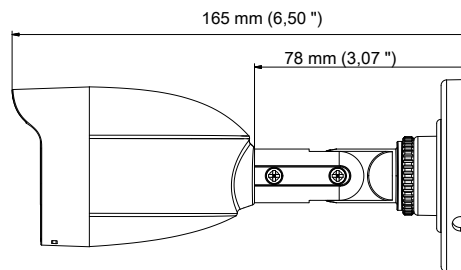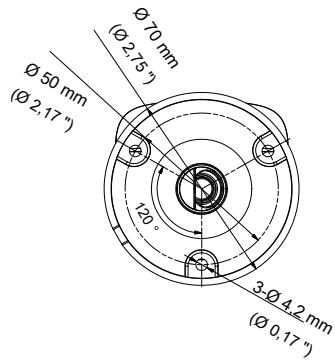

Accesorios



DS-1280ZJ-XS
Caja de conexiones



DS-1H18
Video Balun

DVR-200G-K1 TURBO HD DVR

Key Feature

- H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 video compression
- HDTVI/AHD/CVI/TVBS/IP video input
- Audio via coaxial cable
- Up to 6/12-ch IP camera inputs (up to 1080p/5 MP)
- Max. 1200 m for 720p HDTVI signal



Compression and Recording

- H.265 Pro+ video compression improves encoding efficiency, and reduces data storage costs
- Full channel recording at up to 1080p resolution

Storage and Playback

- 1 SATA interface (up to 4 TB capacity per HDD)
- Smart search for efficient playback

Network & Ethernet Access


- HiLookVision & DDNS (Dynamic Domain Name System) for easy network management
- 64/72 Mbps total bandwidth

Specification

Model	DVR-204G-K1		DVR-208G-K1
Recording			
Video compression	H.265 Pro+/H.265 Pro/H.265/H.264+/H.264		
Encoding resolution	When 1080p lite mode not enabled: 720p/WD1/4CIF/VGA/CIF When 1080p lite mode enabled: 1080p Lite/HD 720p Lite/WD1/4CIF/VGA/CIF		
Frame rate	Main stream: When 1080p Lite mode not enabled: For 720p stream access: 720p/WD1/4CIF/VGA/CIF@25 fps (P)/30 fps (N) When 1080p Lite mode enabled: 1080p Lite/HD 720p Lite/WD1/4CIF/VGA/CIF@25 fps (P)/30 fps (N)	Main stream: When 1080p Lite mode not enabled: For 720p stream access: 720p/WD1/4CIF/VGA/CIF@15 fps; For SD stream access: WD1/4CIF/VGA/CIF@25 fps (P)/30 fps (N) When 1080p Lite mode enabled: 1080p Lite/HD 720p Lite/WD1/4CIF/VGA/CIF@15 fps	
	Sub-stream: 4CIF/CIF/QVGA@25 fps (P)/30 fps (N)	Sub-stream: CIF/QVGA@25 fps (P)/30 fps (N)	
Video bit rate	32 Kbps to 4 Mbps		
Stream type	Video, Video & Audio		
Audio compression	G.711u		
Audio bit rate	64 Kbps		
Video and Audio			
IP video input	1-ch (up to 5-ch)	2-ch (up to 10-ch)	
	Up to 1080p resolution	Up to 5 MP resolution	
	Support H.265+/H.265/H.264+/H.264 IP cameras		
Analog video input	4-ch	8-ch	
	BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection		
Turbo HD input	1080p25, 1080p30, 720p25, 720p30		
AHD input	1080p25, 1080p30, 720p25, 720p30		
HDCVI input	1080p25, 1080p30, 720p25, 720p30		
CVBS input	Support		
HDMI/VGA output	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz HDMI/VGA simultaneous output		
Audio input	1-ch RCA (2.0 Vp-p, 1 KΩ)		
	4-ch via coaxial cable	8-ch via coaxial cable	
Audio output	1-ch, RCA (Linear, 1 KΩ)		
Two-way audio	Reuse the first audio input		
Synchronous playback	4-ch	8-ch	
Network			
Remote connection	32	64	
Network protocol	TCP/IP, PPPoE, DHCP, HiLookVision, DNS, DDNS, NTP, SADP, SMTP, NFS, iSCSI, UPnP™, HTTPS		
Network interface	1, RJ45 10/100 Mbps self-adaptive Ethernet interface		
Auxiliary interface			
SATA	1 SATA interface		
Capacity	Up to 4 TB capacity for each disk		
Alarm in/out	N/A		

USB interface	Rear panel: 2 × USB 2.0	
General		
Power supply	12 VDC, 1.5 A	
Consumption (without HDD)	≤ 16 W	≤ 17 W
Working temperature	-10 °C to 55 °C (14 °F to +31 °F)	
Working humidity	10% to 90%	
Dimension (W × D × H)	260 × 222 × 45 mm (10.2 × 8.7 × 1.8 inch)	
Weight (without HDD)	≤ 1.1 kg (2.4 lb)	

Physical Interface

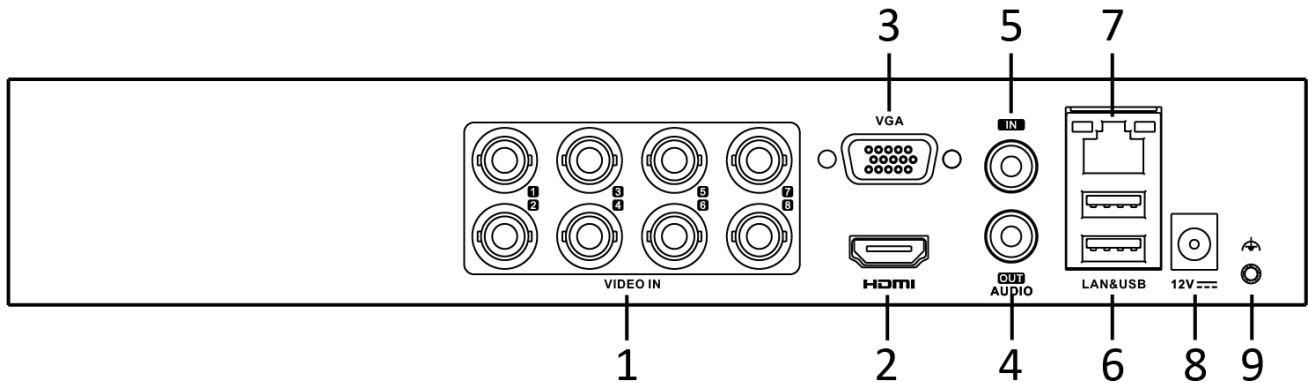

*: The rear panel of DVR-204G-K1 provides 4 video input interfaces.

No.	Description	No.	Description
1	Video and Audio in	6	USB Interface
2	HDMI Interface	7	LAN Network Interface
3	VGA Interface	8	12 VDC Power Input
4	AUDIO OUT	9	GND
5	AUDIO IN		

Available Model

DVR-204G-K1, DVR-208G-K1